




Allied-Locke Industries
 1088 Corregidor, Green River
 Industrial Park, Dixon, IL 61021
Toll Free: 800-435-7752
Email: info@alliedlocke.com

Allied-Locke Steel Pintle Chains feature all heat-treated parts and quad-staked pins. Their open barrel design eliminates material build-up in the root of the sprockets, assuring smoother operation, uniform link wear, and greater resistance to fatigue.

Dimensions are given in inches.

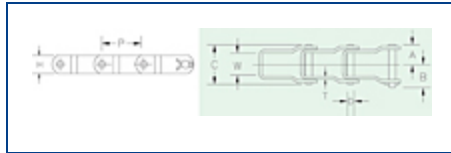

[Specifications](#) | [Applications Served](#)

Specifications

Links per 10'	72
Weight per 10'	10.5 lb
Min. Avg. Tensile Strength	8,500 lb
Pitch (P)	1.664
Inside Width (W)	0.906
Pin Diameter (D)	0.281

Height (H)	0.720
Thickness (T)	0.125
Connector Length (A)	0.797
Connector Length (B)	0.885

Applications Served

agriculture
conveyors
forage harvesters and baggers
live bottom trailers
manure spreaders
salt and sand spreaders