


ALLIED-LOCKE INDUSTRIES

INCORPORATED

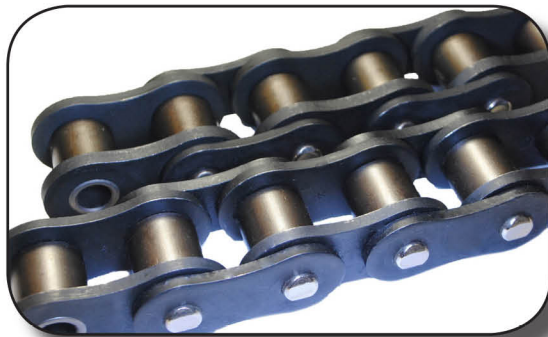

SLB™

Lube Free Solutions

The popularity of our SLB™ lube free precision roller chains has been expanding over the years as the benefits are being realized in a wide range of markets. This chain offers an effective solution to our customers who need to eliminate lubricants from their process. If you need cleanliness and less maintenance, we have your solution. Our SLB™ chains are assembled with nickel plated pins and specially treated side plates. We also use heat treated, sintered, oil-impregnated bushings that are made of materials that resist wear and promote smooth action. Our carefully selected roller material enhances the wear capacity of the chain. SLB™ chains are interchangeable with standard ANSI sprockets. SLB™ chains are also available in heavy series, multiple strands and metric sizes.

Dimensions In Inches										
Chain No.	Pitch	Roller		Riv. End to Center Line	Conn. End to Center Line	Link Plate		Pin Diameter	Avg. Ultimate Strength	Avg. Weight
		Width	Dia.			Height	Thickness			
	P	W	D	A	B	H	T	E	Lbs.	Lbs./Ft.
35SLB	0.375	0.187	0.200	0.228	0.274	0.346	0.050	0.118	2360	0.20
40SLB	0.500	0.312	0.312	0.324	0.406	0.472	0.060	0.157	4185	0.41
50SLB	0.625	0.374	0.400	0.400	0.488	0.591	0.080	0.200	6850	0.71
60SLB	0.750	0.500	0.469	0.501	0.601	0.709	0.094	0.235	9240	1.04
80SLB	1.000	0.613	0.625	0.650	0.781	0.949	0.125	0.313	17500	1.79
100SLB	1.250	0.752	0.750	0.795	0.913	1.185	0.156	0.376	25300	2.70
120SLB	1.500	1.000	0.875	1.005	1.174	1.421	0.187	0.437	37500	4.03
C2040SLB	1.000	0.312	0.312	0.324	0.406	0.472	0.060	0.157	4185	0.32
C2050SLB	1.250	0.374	0.400	0.400	0.488	0.591	0.080	0.200	6850	0.54
C2060HSLB	1.500	0.500	0.469	0.567	0.665	0.709	0.125	0.235	9240	0.95
C2080HSLB	2.000	0.625	0.625	0.720	0.873	0.950	0.157	0.312	15152	1.60

Stocked at our warehouses in Dixon, IL and Union, MS

ALLIED-LOCKE

1088 Corrigedor Road

Dixon, IL 61021

(800) 435-7752

www.alliedlocke.com



ISO 9001

Registered Quality System
DIXON, IL FACILITY ONLY
CS185 REV 3/19

